


BRASS RODS AND PROFILES

DETAILED SPECIFICATION OF PRODUCT RANGE AND THEORETICAL WEIGHT


Round, extruded brass profiles

Diameter in mm	Weight kg / m
3.00	0.063
4.00	0.107
4.50	0.135
5.00	0.167
5.50	0.202
6.00	0.240
6.50	0.282
7.00	0.327
7.50	0.376
8.00	0.427
8.50	0.482
9.00	0.541
9.50	0.602
10.00	0.668
10.50	0.736
11.00	0.808
11.50	0.883
12.00	0.961
12.50	1.040
13.00	1.130
13.50	1.220
14.00	1.310
14.50	1.400
15.00	1.500
15.50	1.600
16.00	1.710
16.50	1.820
17.00	1.930
17.50	2.040
18.00	2.160
19.00	2.410
20.00	2.670
21.00	2.940
22.00	3.230

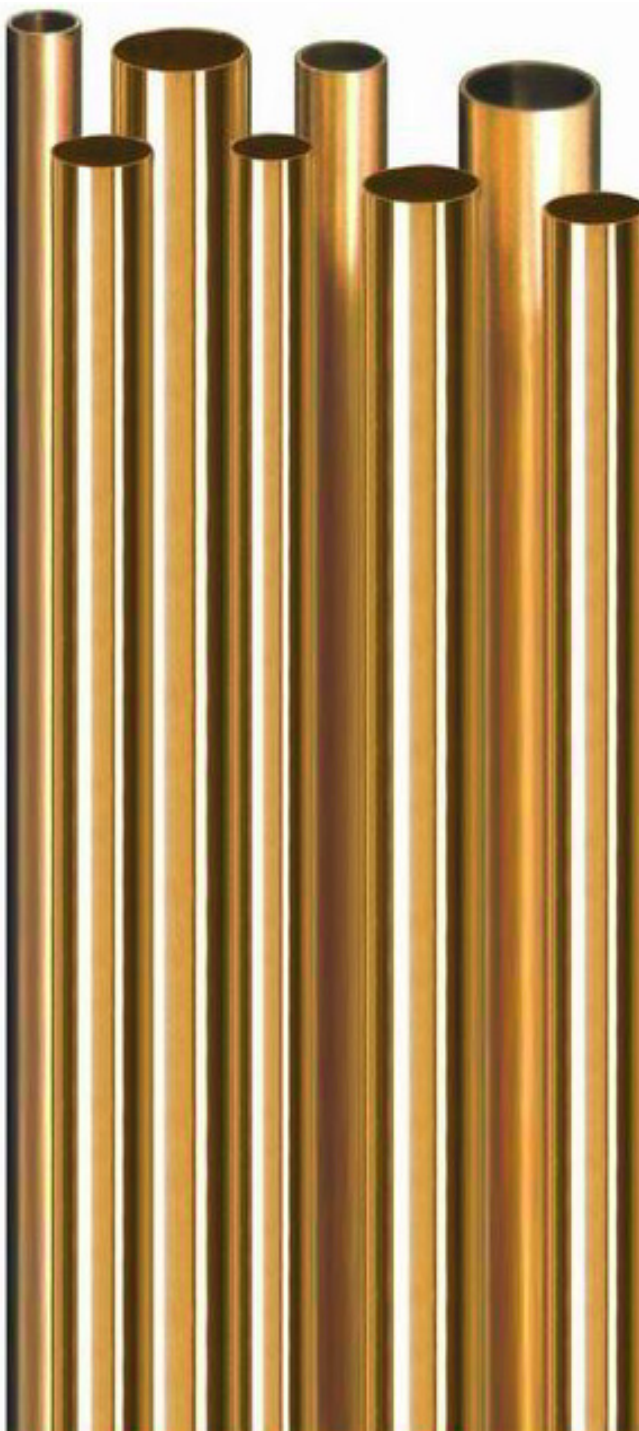

**Round, extruded brass
profile**

Diameter in mm	Weight kg / m
23.00	3.530
24.00	3.850
25.00	4.170
26.00	4.510
27.00	4.870
28.00	5.230
29.00	5.610
30.00	6.010
32.00	6.840
33.00	7.270
34.00	7.720
35.00	8.180
36.00	8.650
38.00	9.640
39.00	10.200
40.00	10.700
42.00	11.800
45.00	13.500
48.00	15.400
50.00	16.700
52.00	18.100
55.00	20.200
56.00	20.900
60.00	24.000
65.00	28.020
70.00	32.700
75.00	37.600
80.00	42.700
90.00	55.000

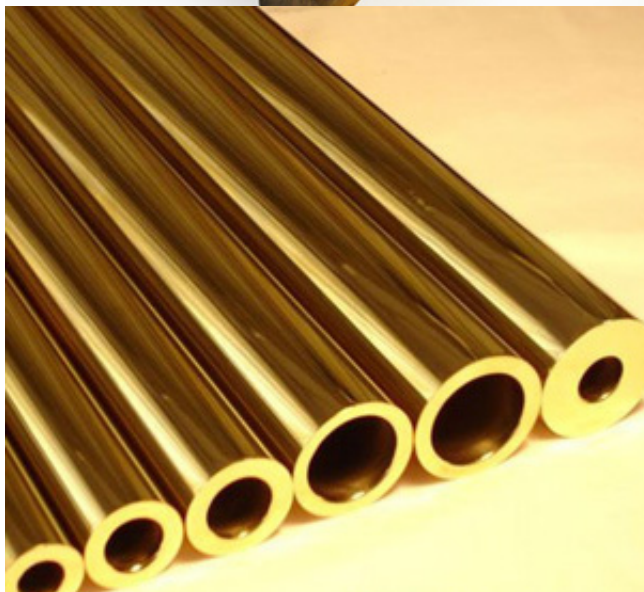

Square, extruded brass profile

Diameter in mm	Weight kg / m
4.00	0.136
4.50	0.172
5.00	0.212
5.50	0.257
6.00	0.306
7.00	0.416
8.00	0.544
9.00	0.688
10.00	0.850
11.00	1.030
12.00	1.220
14.00	1.670
15.00	1.910
16.00	2.180
17.00	2.460
18.00	2.750
19.00	3.070
20.00	3.400
22.00	4.110
24.00	4.900
26.00	5.750
27.00	6.200
28.00	6.660
30.00	7.650
32.00	8.700
36.00	11.000
41.00	14.300
46.00	18.000
50.00	21.200
55.00	25.700
60.00	30.600



**Hexagonal, extruded
brass profile**

Diameter in mm	Weight kg / m
4.00	0.118
4.50	0.149
5.00	0.184
5.50	0.223
6.00	0.265
7.00	0.361
8.00	0.471
9.00	0.596
10.00	0.736
11.00	0.891
12.00	1.060
14.00	1.440
17.00	2.130
19.00	2.660
22.00	3.560
24.00	4.240
27.00	5.370
30.00	6.620
32.00	7.540
36.00	9.540
41.00	12.400
46.00	15.600
50.00	18.400
55.00	22.300
60.00	26.500



The weights specified in these tables are theoretical and established based on a unique formula for calculating the weight of pulled brass products (product tolerances in accordance with the EN standard).